


Ampron LED Video Wall Products

OUTDOOR GOLD

Model Type	Outdoor Pro P3	Outdoor Pro P4	Outdoor Pro P5	Outdoor Pro P8	Outdoor Pro P10
Pixel Pitch	P3	P4	P5	P8	P10
Brightness	6000 nits	6000 nits	6000 nits	6500 nits	7000 nits
Min. Viewing distance	3 meters	4 meters	5 meters	8 meters	10 meters
Power Consumption max	850 W/m ²	909 W/m ²	836 W/m ²	866 W/m ²	850 W/m ²
Refresh rate	≥3840	≥3840	≥3840	≥3840	≥3840
LED modules	RGB SMD LED				
Contrast	5000:1				
Area	1m ²				
Frame material	Magnesium Alloy				
Operating Temperature	-30°C ... +50°C				
Input Voltage	240VAC				
Weight	33kg				
Viewing angle	H:140 V:130				
Color	16 bit/color				
Interface port	LAN CAT 5/5e/6				
Dimensions (WxHxD)	960x960x100 mm				
IP Rating	IP 65				
Serviceability	Rear				
MTBF	>10,000 hours				
Life span	≥100,000 hours (50% brightness)				
Certification	CE, RoHS				
Warranty	1 year				

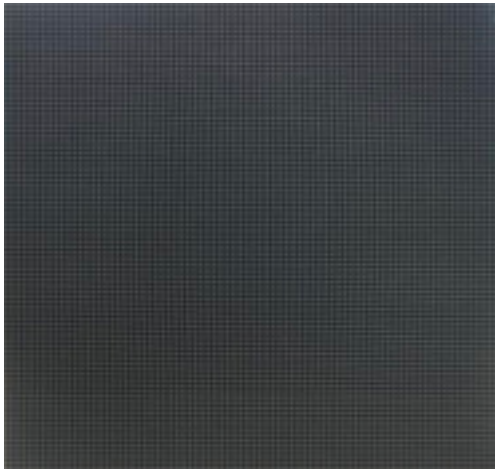

Ampron LED Video Wall Products

INDOOR GOLD

Model Type	Indoor P1.25	Indoor P1.53	Indoor P1.86	Indoor P2	Indoor Pro P2.5	Indoor Pro P3	Indoor Pro P4
Pixel Pitch	P1.86	P1.86	P1.86	P2	P2.5	P3	P4
Brightness	≥500 nits	≥500 nits	≥500 nits	≥500 nits	≥600 nits	≥600 nits	≥600 nits
Min. Viewing distance	1.2 meters	1.5 meters	1.9 meters	2 meters	2 meters	3 meters	4 meters
Power Consumption max	≥580 W/m ²	≥570 W/m ²	≥409 W/m ²	≥439 W/m ²	≥457 W/m ²	≥540 W/m ²	≥465 W/m ²
Refresh rate (Hz)	≥1920	≥1920	≥1920	≥1920	≥3840	≥3840	≥3840
LED modules	RGB SMD LED						
Contrast	5000:1						
Area	0.307m ²						
Frame material	Magnesium Alloy						
Operating Temperature	0°C ... +50						
Input Voltage	240VAC						
Weight	7.84kg						
Viewing angle	H:140 V:130						
Color	16 bit/color						
Interface port	LAN CAT 5/5e/6						
Dimensions (WxHxD)	640x480x75 mm						
IP Rating	IP 43						
Serviceability	Front/Rear						
MTBF	>10,000 hours						
Life span	≥100,000 hours(50% brightness)						
Certification	CE, RoHS						
Warranty	1 year						



Ampron LED Video Wall products

Packages

	Bronze	Silver	Gold
Price	- 20% from gold	- 10% from gold	rate card price
Payment conditions	100% prepayment	70% prepayment	60% prepayment
LED SMD	Copper wire	Copper wire	Golden wire
Refresh rate	1920Hz	1920Hz	3840Hz
Maximum brightness	- 20% from gold	- 20% from gold	rate card value
MTBF	>5,000 hours	>7,000 hours	>10,000 hours
Life span	≥70,000 hours	≥80,000 hours	≥100,000 hours
Energy efficiency	- 20% from gold	- 20% from gold	100%
Shipment	180 days	150 days	90 days
Factory burn-in tests	24 hrs	48 hrs	72 hrs
Midlife upgrade need	after 4 years	after 5 years	after 7 years
Midlife upgrade discount	0%	-10%	-20%